


SPEBILIZED IN SEALS



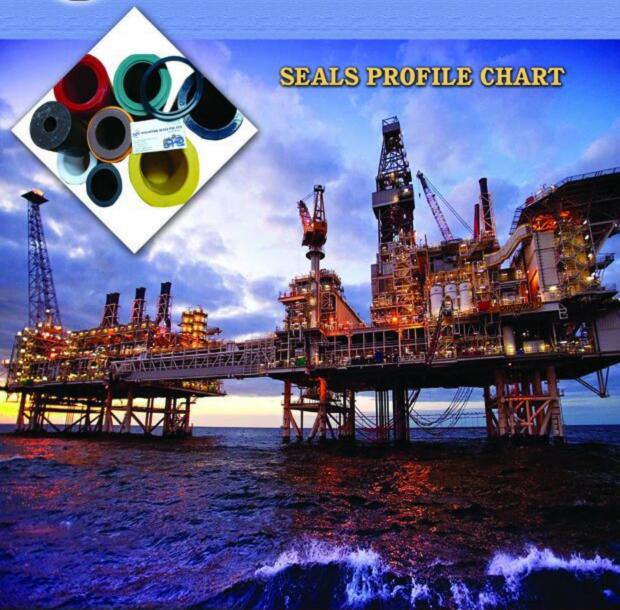

www.singaporeseals.com

Contact: +65 64442100

+65 82445585

Email: office@singaporeseals.com

SINGAPORE SEALS PROFILE CHART

WIPER	7		5					{	D	7
WS SEALS	WS 01	WS 02	WS 03	WS 04	WS 05	WS 06	WS 07	WS 08	WS 09	WS 10
WS 11	WS 12	WS 13	WS 14	WS 15	WS 16					
GUIDE GR RINGS	GR 01	GR 02	GR 03	GR 04	GR 05	GR 06	GR 07	GR 08	GR 09	
BACK UP BR RINGS	BR 01	BR 02	BR 03	BR 04	BR 05	BR 06	BR 07	BR 08		
STATIC SS SEALS	O SS 01	SS 02	SS 03	SS 04	SS 05	SS 06	€ SS 07	SS 08	SS 09	SS 10
ROD RS SEALS	RS 01	RS 02	RS 02 A	RS 03	RS 04	RS 04 A	RS 05	RS 06	RS 07	RS 08
RS 08 A	O RS 09	RS 09A	RS 09B	RS 10	RS 10A	RS 11	RS 11A	RS 12 ****	RS 13	RS 14
RS 15	RS 16	RS 17	RS 18				li e			
PISTION PS SEALS	PS 01	PS 02	PS 02 A	PS 03	PS 04	PS 04 A	PS 05	PS 06	PS 07	PS 08
PS 09	PS 09 A	PS 09 B	PS 10	PS 10 A	M	PS 11 A		•	PS 14	~
PS 16	PS 17	PS 18	PS 19	PS 20						
OS SEALS	OS 01	0S 02	OS 03	0S 04	OS 04 A	0S 05	0S 06	OS 07		

Our Standard Materials Include :- Pu (Red), NBR (Black), PTFE (White), PTFE CARBON FILLED PTFE BRONZE FILLED, PTFE - GLASS FILLED, POM, NYLON, PEEK, VITON

SHORE A and SHORE D with PRESSURE UPTO 700BAR, Temparature from -200 to +260 degree celsius